



**TRANE**<sup>®</sup>

**4TTX5018-SUB-100.05**

TAG: \_\_\_\_\_

# SUBMITTAL

NOTE: All dimensions are in mm/inches.


## 1½ Ton Split System Cooling — 1 Phase

### 4TTX5018A

#### Product Specifications

OUTDOOR UNIT <sup>①②</sup>	4TTX5018A1000B
<b>POWER CONNS.</b> — V/PH/HZ <sup>③</sup>	200/230/1/60
MIN. BRCH. CIR. AMPACITY	8
BR. CIR. PROT. RTG. - MAX. (AMPS)	15
<b>COMPRESSOR</b>	CLIMATUFF <sup>®</sup>
NO. USED - NO. SPEEDS	1 - 1
VOLTS/PH/HZ	200/230/1/60
R.L. AMPS <sup>⑦</sup> - L.R. AMPS	6.2 - 38.6
FACTORY INSTALLED	
START COMPONENTS <sup>⑧</sup>	YES
INSULATION/SOUND BLANKET	YES
COMPRESSOR HEAT	NO
<b>OUTDOOR FAN</b>	PROPELLER
DIA. (IN.) - NO. USED	27.6 - 1
TYPE DRIVE - NO. SPEEDS	DIRECT - 1
CFM @ 0.0 IN. W.G. <sup>④</sup>	3310
NO. MOTORS - HP	1 - 1/8
MOTOR SPEED R.P.M.	825
VOLTS/PH/HZ	200/230/1/60
F.L. AMPS	0.74
<b>OUTDOOR COIL — TYPE</b>	SPINE FIN <sup>™</sup>
ROWS - F.P.I.	1 - 24
FACE AREA (SQ. FT.)	21.99
TUBE SIZE (IN.)	3/8
<b>REFRIGERANT</b>	
LBS. — R-410A (O.D. UNIT) <sup>⑤</sup>	6 LBS., 9 OZ.
FACTORY SUPPLIED	YES
LINE SIZE - IN. O.D. GAS <sup>⑥</sup>	1/2
LINE SIZE - IN. O.D. LIQ. <sup>⑥</sup>	3/8
<b>CHARGING SPECIFICATION</b>	
SUBCOOLING	10°F
<b>DIMENSIONS</b>	H X W X D
CRATED (IN.)	45.4 x 35.1 x 38.7
<b>WEIGHT</b>	
SHIPPING (LBS.)	271
NET (LBS.)	227

- ① Certified in accordance with the Air-Source Unitary Heat Pump Equipment certification program, which is based on AHRI standard 210/240.
- ② Rated in accordance with AHRI standard 270.
- ③ Calculated in accordance with Natl. Elec. Codes. Use only HACR circuit breakers or fuses.
- ④ Standard Air — Dry Coil — Outdoor
- ⑤ This value approximate. For more precise value see unit nameplate.
- ⑥ Max. linear length 60 ft.; Max. lift - Suction 60 ft.; Max lift - Liquid 60 ft. For greater length consult refrigerant piping software Pub. No. 32-3312-0\* (\* denotes latest revision).
- ⑦ This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.
- ⑧ No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter.

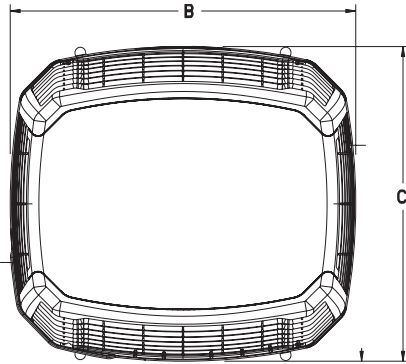

SERVICE PANEL  
ELECTRICAL AND REFRIGERANT  
COMPONENT CLEARANCES  
PER PREVAILING CODES.

UNIT SHOULD BE PLACED SO ROOF  
RUN-OFF WATER DOES NOT POUR  
DIRECTLY ON UNIT, AND SHOULD BE  
AT LEAST 305 (12") FROM WALL AND ALL  
SURROUNDING SHRUBBERY ON TWO SIDES.  
OTHER TWO SIDES UNRESTRICTED.

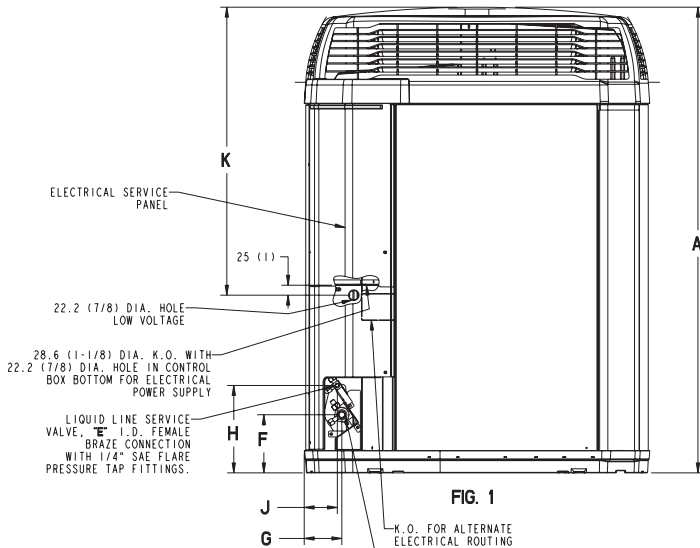


FIG. 1

K.O. FOR ALTERNATE  
ELECTRICAL ROUTING  
GAS LINE 1/4 TURN BALL SERVICE  
VALVE, "D" I.D. FEMALE BRAZED CONNECTION  
WITH 1/4" SAE FLARE PRESSURE  
TAP FITTING.

From Dwg. 21D152635 Rev. 14

#### A-WEIGHTED FULL OCTAVE SOUND POWER LEVEL dB - [dB(A)] HIGH STAGE

MODEL	SOUND POWER LEVEL [dB(A)]	63	125	250	500	1000	2000	4000	8000
4TTX5018A1	73	51	58	65.3	68.2	64.5	66.4	59	51.6

NOTE: Rated in accordance with AHRI Standard 270-2008.

# Mechanical Specification Options

## General

The 4TTX5 is fully charged from the factory for up to 15 feet of piping. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 1995. Exterior is designed for outdoor application.

## Casing

Unit casing is constructed of heavy gauge, G90 galvanized steel and painted with a weather-resistant powder paint on all louvers, panels, prepaint on all other panels. Corrosion and weatherproof CMBP-G30 DuraTuff™ base.

## Refrigerant Controls

Refrigeration system controls include condenser fan and compressor contactor. High and low pressure controls are inherent to the compressor. A factory installed liquid line drier is standard.

## Compressor

The Climatuff® compressor features internal over temperature and pressure protection and total dipped hermetic motor. Other features include centrifugal oil pump and low vibration and noise.

## Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

## Low Ambient Cooling

As manufactured, this unit has a cooling capability to 55°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30° F.

## Accessories

**Thermostats** — Cooling only and heat/cooling (manual and automatic changeover). Sub-base to match thermostat and locking thermostat cover.

**Evaporator Defrost Control** — See Low Ambient Cooling.



05/12



Trane  
6200 Troup Highway  
Tyler, TX 75707  
www.trane.com

Trane has a policy of continuous product and product data improvement and it reserves the right to change design and specifications without notice.